



DIMENSIONS

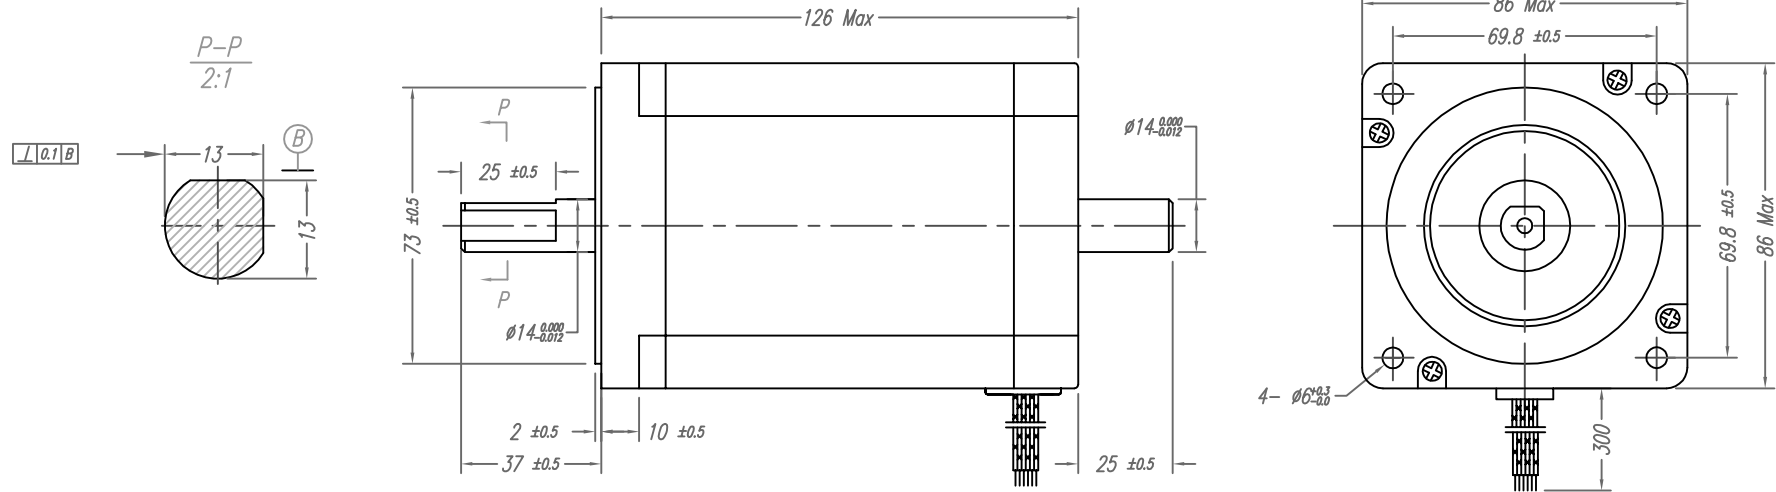

SPECIFICATIONS

PHASE	2 PHASE	
STEP ANGLE	1.8±5% °/STEP	
DETENT TORQUE	18.5 N.cm Max	
INSULATION CLASS	B	
LEAD STYLE	AWG20 UL1007	
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL
CURRENT	3.53 A/PHASE	2.5 A/PHASE
RESISTANCE	1.4 ±10% Ω/PHASE	2.8 ±10% Ω/PHASE
INDUCTANCE	5.8 ±20% mH/PHASE	23.2 ±20% mH/PHASE
HOLDING TOGQUE	620 N.cm Min	880 N.cm Min

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

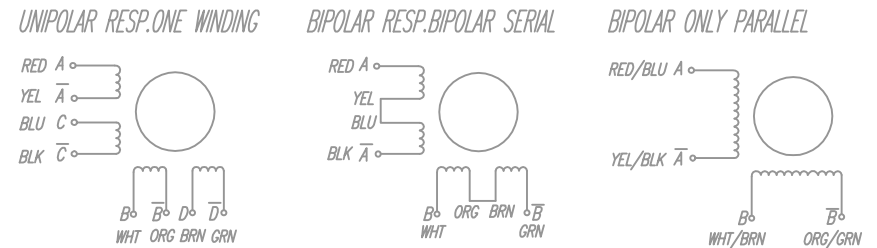

DATE 20070106
EDIT A

unit=mm
ESC=2:1



www.machinet.com.ar

34HS8825
(34HS2835-05)

34HS8825

BIPOLAR ONLY PARALLEL

BIPOLAR RESP. BIPOLAR SERIAL

