



DIMENSIONS

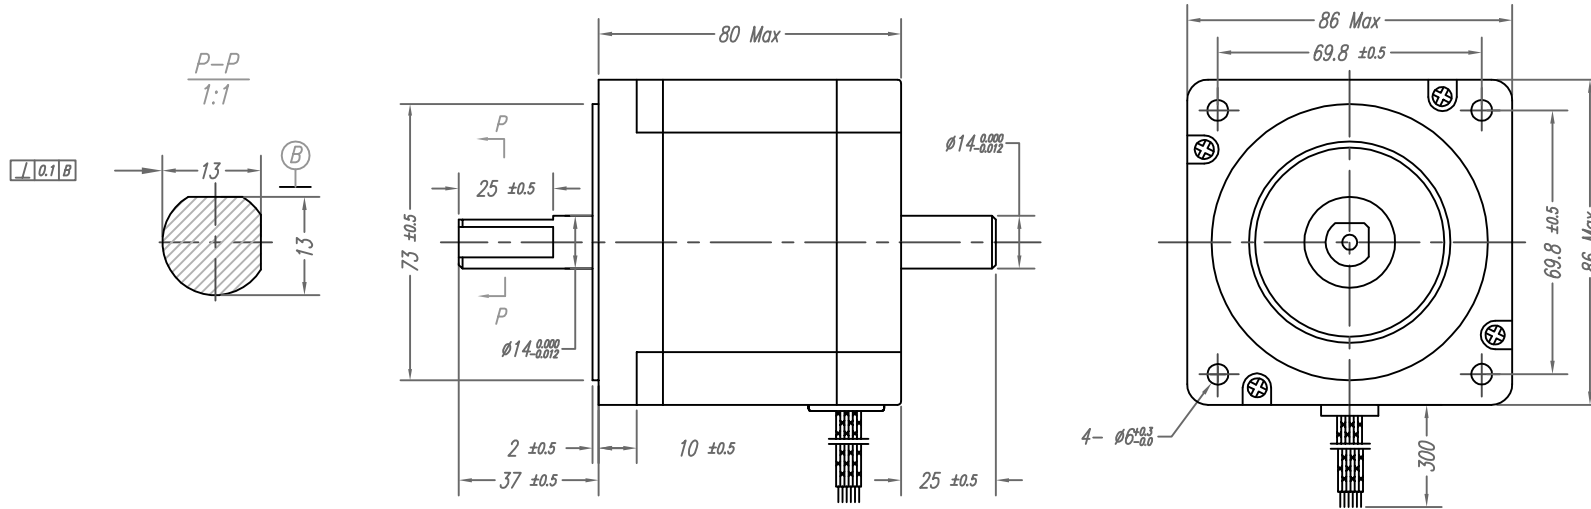

SPECIFICATIONS

PHASE	2	PHASE
STEP ANGLE	1.8±5%	°/STEP
DETENT TORQUE	26	N.cm Max
INSULATION CLASS	B	
LEAD STYLE	AWG20 UL1007	
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL
CURRENT	3.53 A/PHASE	2.5 A/PHASE
RESISTANCE	0.8 ±10% Ω/PHASE	1.6 ±10% Ω/PHASE
INDUCTANCE	3.2 ±20% mH/PHASE	12.8 ±20% mH/PHASE
HOLDING TOGQUE	300 N.cm Min	420 N.cm Min

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

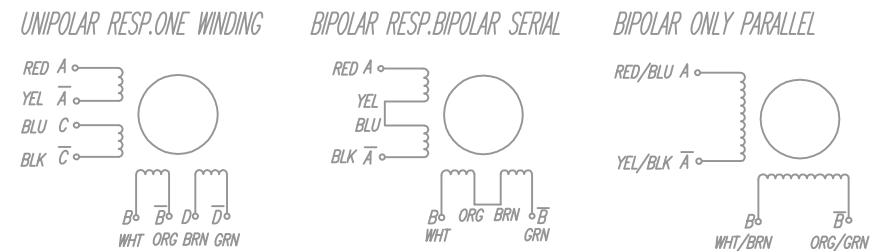

DATE 20070106  
EDIT A

unit=mm  
ESC=2:1



www.machinet.com.ar

34HS4225  
34HS0835-05