



DIMENSIONS

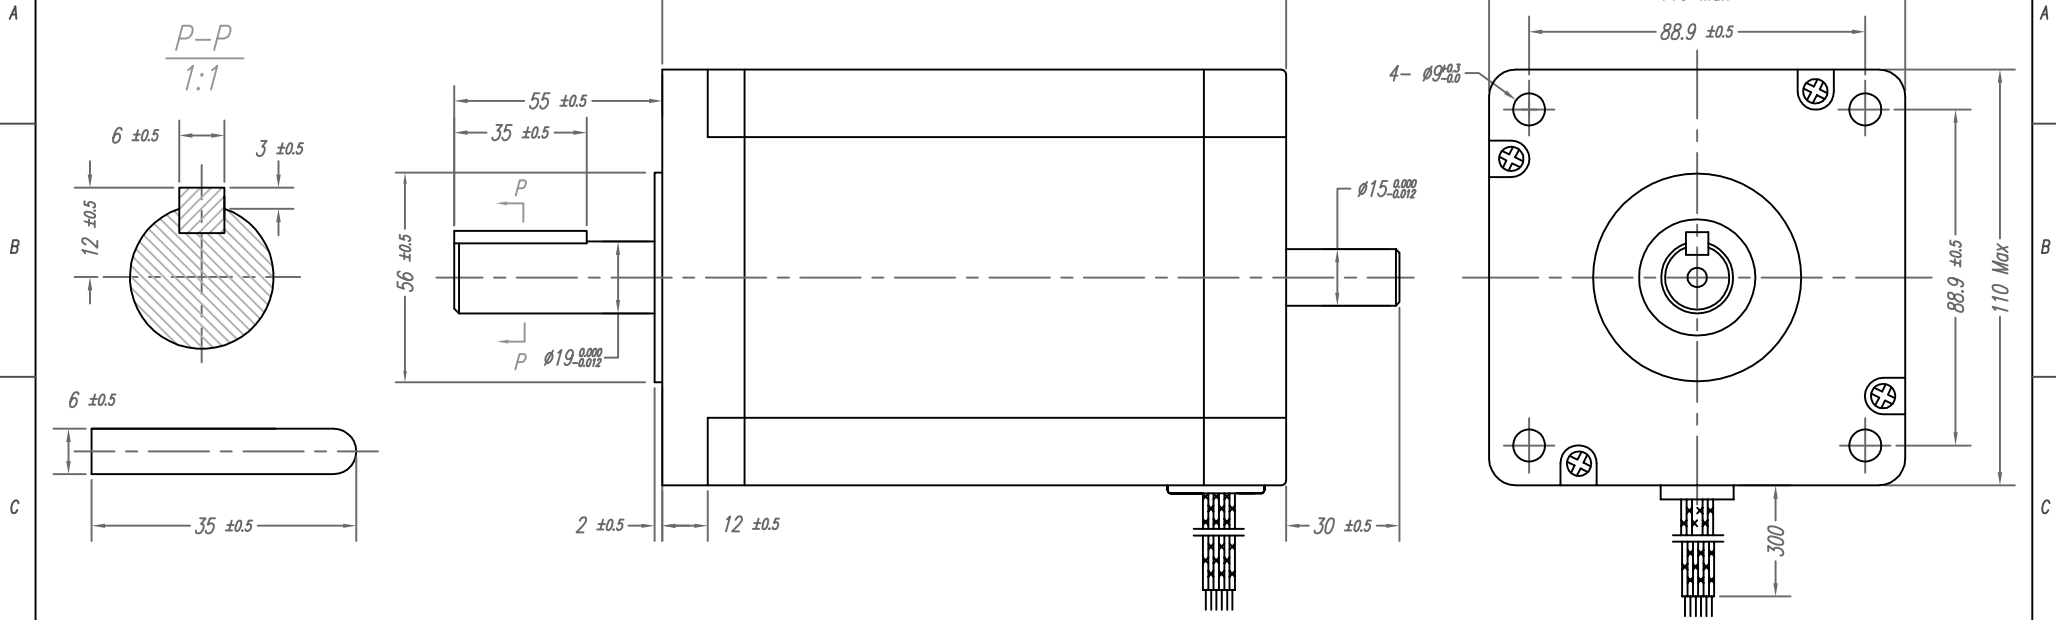

SPECIFICATIONS

PHASE	2	PHASE	
STEP ANGLE	1.8±5%	°/STEP	
DETENT TORQUE	18.5	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG20 UL1007		
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL	BIPOLAR ONLY PARALLEL
CURRENT	5.00 A/PHASE	3.57 A/PHASE	7.1 A/PHASE
RESISTANCE	1.37 ±10% Ω/PHASE	2.7 ±10% Ω/PHASE	0.7 ±10% Ω/PHASE
INDUCTANCE	3.2 ±20% mH/PHASE	12.8 ±20% mH/PHASE	3.2 ±20% mH/PHASE
HOLDING TOGQUE	17 N.m Min	24 N.m Min	24 N.m Min

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

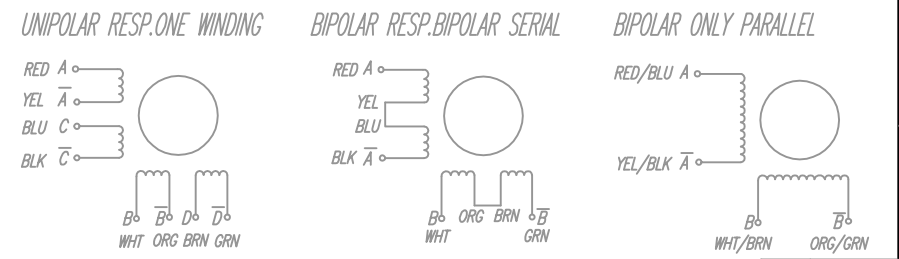

DATE 20090414
EDIT A

unit=mm

20090414

MACHI-NET
Diseño y Automatización Industrial

www.machinet.com.ar

43HS24035
43HS6850-05

43HS24035

BIPOLAR ONLY PARALLEL

— PULL OUT
● PULL IN RATE

